


# HOT WATER GUARANTEED\*



- ☀️ Anti corrosive stand
- ☀️ Robust stand design
- ☀️ Designer tank cap
- ☀️ Easy replacement of electric backup
- ☀️ Specially developed Anti corrosive coating

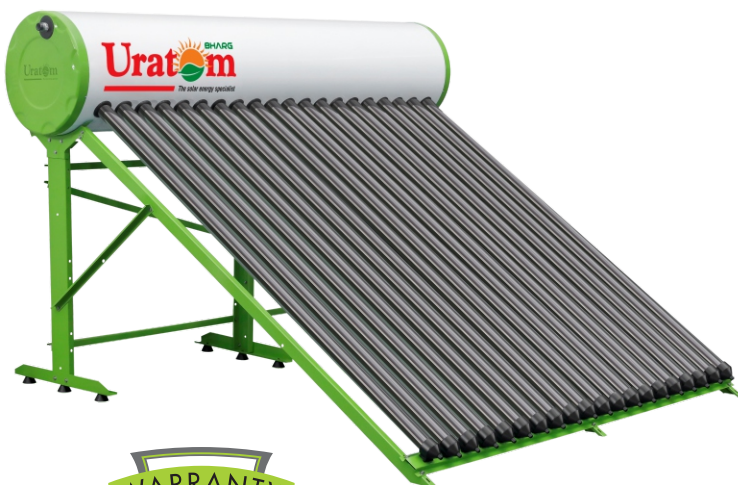

\* शरतोने आधीन



\* शरतोने आधीन

Solar Water Heater, Solar Panel, Solar Inverter, Heat Pump,  
BLDC Solar Pump, E-bicycle



## Benefits for you

- Get Hot Water Entire Year Without Using Gas Or Electricity
- Almost Zero Maintenance
- 100% Dependable Compared to Gas & Electric Geyser

Technical Specification :	
Material	1.6mm Borosilicate 3.3 glass
Dimension	O.D. 47mm / 58mm / 70mm I.D. 37mm / 47mm / 54mm Lenth : 1500mm / 1800mm 2100mm
Glass Thickness	1.6mm
Absorptive Coating	CU - AL - N / SS (Three Layer)
Absorptance	>92% (Am1.5)
Amission	<8% (80°C)
Vacume	P < 5x10 <sup>-3</sup> PA
Stagnation temperature	>200° C
Heat loss	<0.8w / sq.mtr.
Maximum strength	0.8 MPa

Technical Specifications for Tank (Bharg Model)	
Inner Tank	2.5mm Galvanized Iron (G.I) TIG & MIG Welded
Inner Coating	High Grade Emulation GL Coating
Outer Cladding	0.45mm Galvanized Iron (G.I) with P P Powder Coating
Insulation	50mm PUF (38kg. / mt <sup>3</sup> density)
Stand	1.4 mm (G.I) with P P Powder Coating or 30 x 30 x 3mm M.S with P P Powder Coating
Connections	1"
Electric Backup Provision	1.25"

- Increased Heating Efficiency Due To Specially Developed Triple Coated Glass Tube
- New Attractive stand look
- Zero Running Cost

Technical Specifications for Tank (Ray Model)	
Inner Tank	1.6mm Galvanized Iron (G.I) TIG or MIG Welded
Outer Cladding	0.45mm Galvanized Iron (G.I) with P P Powder Coating
Insulation	50mm PUF (38kg. / mt <sup>3</sup> density)
Stand	1.4 mm (G.I) with P P Powder Coating or 30 x 30 x 3mm M.S with P P Powder Coating
Connections	1"
Electric Backup Provision	1.25"

## Applications

- Household Water Heating
- Hostel
- Hospital
- Hotels & Restaurant
- Swimming Pool
- Health Club
- Boiler Feed Water Preheating



## Uratom Projects



**Uratom Solar (India) Pvt. Ltd.**  
 Survey No.752 P1, National Highway 27, Near Chordi Village,  
 Gondal - 360 311. (Gujarat) India.  
**E-mail :** care@uratom.com | **Web :** www.uratom.com

**Customer Care :**  
**Gujarat :** +91 99250 99249 | **Maharashtra :** +91 75070 07003  
**North India :** +91 85888 72866

